


# Sand Filter System FSU SERIES

## Ultra Filter System

For above-ground pool

- Valve  
4-Way Multiport Valve
- Max Working Pressure  
28psi/2bar
- Max Water Temperature  
40°C (104°F)
- Suggested Size Of Media  
0.5-0.8mm

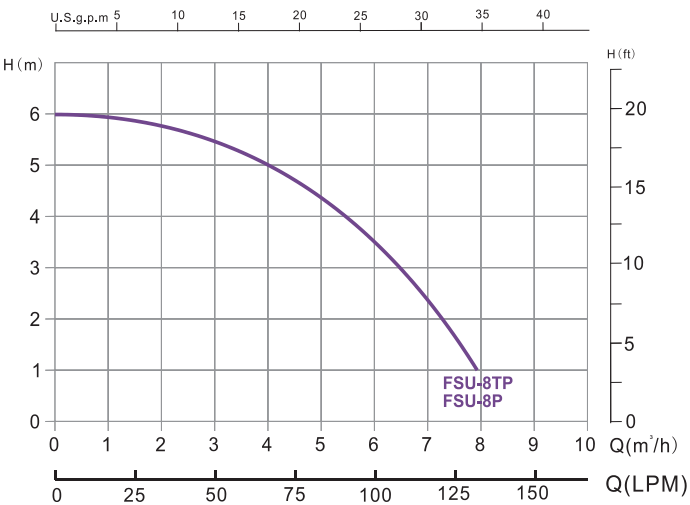


Remarks: Flow curve information based on 220V/50Hz motor.

### Product Information and Dimension

Note: Suggest sand weight varies with differences in filter media size. For reference only.

Code	Model	Filter	Pump	Max. Flow Rate		Sand (kg)	A (mm)	B (mm)	C (mm)	D (mm)	Filter & Pump In/Out Connection	Adaptor
88033669	FSU-8TP	13" Filter	AMU020TP	133.3lpm	8.0m³/h	17	145	460	494	450	1.5" / 50 mm	1 1/4" & 1 1/2" 32 & 38mm
88033671	FSU-8P	13" Filter	AMU020P	133.3lpm	8.0m³/h	17	145	460	494	450	1.5" / 50 mm	1 1/4" & 1 1/2" 32 & 38mm

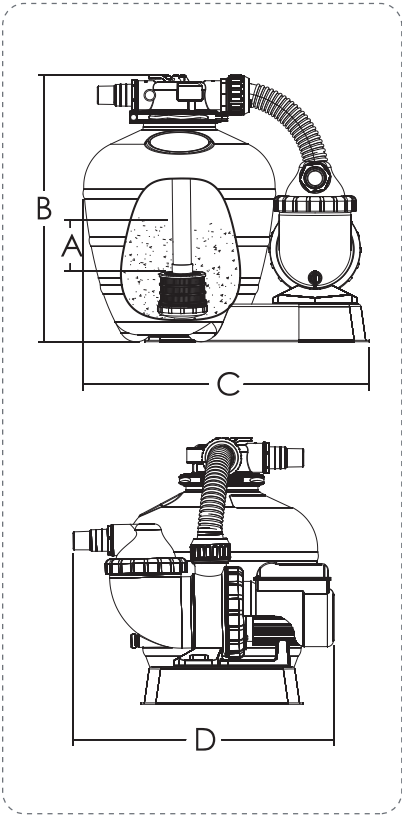

#### FSU Series Filtration Combo

- includes:
- 1) Durable top mount plastic filter tank
  - 2) 4-Way Multiport Valve
  - 3) Aqua-Mini Pump (AMU020TP or AMU020P)
  - 4) Timer (optional)