




**“SR” Series Pump**

“SR” series heavy duty pump delivers high flow and energy efficiency ultra performance. It is suitable for commercial spa pool. 2 inch suction and discharge port with transparent lid. Ring lock seal design to eliminate suction leaks and to maximize suction efficiency.


**Highlight Features:**

- Asynchronous, Two poles
- Class insulation: 130
- IPX5 Waterproof standard
- Built-in thermal protection
- Overload protection
- External heat sink
- Available in 50Hz or 60Hz with 220V/380V/110V
- Special design union compatible for both Imperial and Metric measurement standard
- S.S 316 Shaft
- S.S 316 Mechanical seal

**Technical Information**

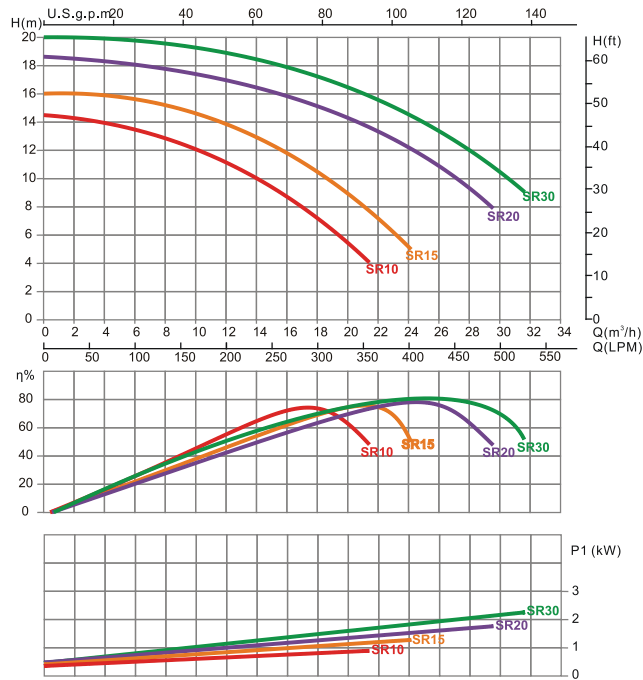

Remarks: Flow curve information based on 220V/50Hz and 380V/50Hz motor.

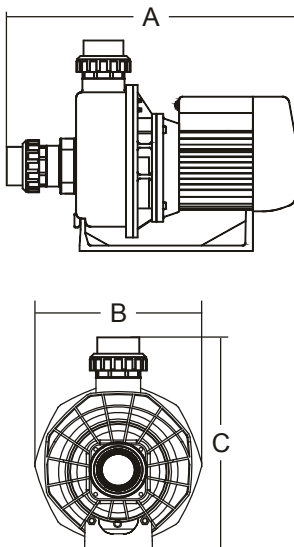

**TECHNICAL INFORMATION & Dimension**

| Code 220V/50Hz | Code 380V/50Hz | Code 110V/60Hz | Model No | Connection Size | Input power | Horsepower |
|----------------|----------------|----------------|----------|-----------------|-------------|------------|
| 88023605       | 88023905       | 88023805       | SR10     | 2 inch 63mm     | 0.97kW      | 1.0hp      |
| 88023607       | 88023907       | 88023807       | SR15     | 2 inch 63mm     | 1.30kW      | 1.5hp      |
| 88023608       | 88023908       | 88023808       | SR20     | 2 inch 63mm     | 1.80kW      | 2.0hp      |
| 88023609       | 88023909       | 88023809       | SR30     | 2 inch 63mm     | 2.18kW      | 3.0hp      |

| Model No | A mm | B mm | C mm | Capacitance 220V | Capacitance 110V | Weight(kg) |
|----------|------|------|------|------------------|------------------|------------|
| SR10     | 557  | 275  | 413  | 25µF             | 90µF             | 14.70      |
| SR15     | 557  | 275  | 413  | 25µF             | 90µF             | 16.30      |
| SR20     | 557  | 275  | 413  | 25µF             | 100µF            | 19.70      |
| SR30     | 557  | 275  | 413  | 25µF             | 100µF            | 22.10      |

