



**PURE CHLORINE &
EASY OPERATION**

SSCnano Salt Chlorinator

For Above and Inground Pool



COMPACT AND SIMPLE INSTALLATION

Emaux SSCnano is simple to install, with basic plumbing and electrical connections, you can have the system up and running in no time. It is compact and easily fits for pool and spa. Compact design makes it can easily fit into tight spaces without compromising its functionality. The control is designed to be user-friendly, making it easy to set up and operate, allows you to adjust the chlorine production according to your specific needs. You can tailor the chlorine output to maintain the desired sanitization level for your pool or spa.



CE IPX4

Product feature:

- ON/OFF operation
- Water flow switch
- Auto self cleaning reverse polarity
- Temperature sensor
- Long cell life


Salt level alert

Adjustable chlorine production time

Preset timer



Installation Diagram

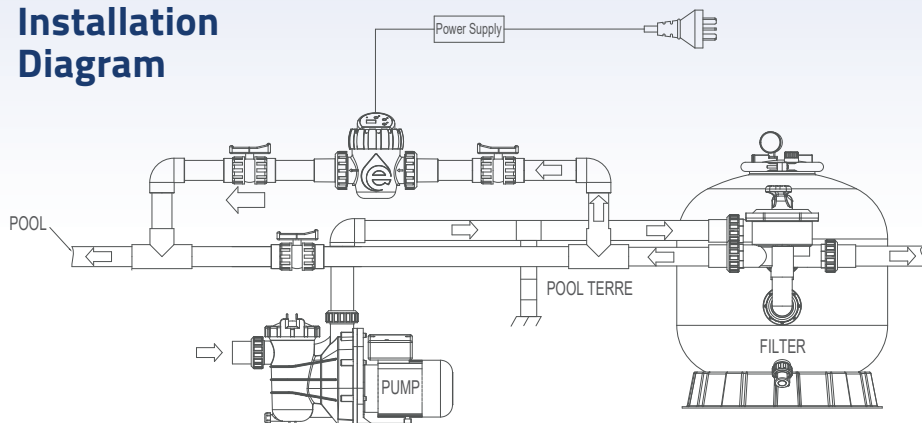

Material

PMMA / ABS

Operation Voltage

110V - 240V

Max. pool volume

20 m³ - 50 m³

Salt Level

3500 ppm


Working Temperature

10 - 45 °C


Waterproof Standard

IPX4


3 installation methods:

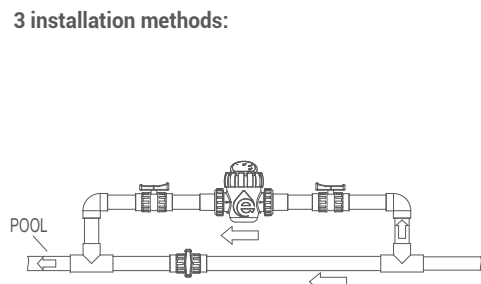

Horizontal Installation



Vertical Installation



Flexi hose connector Installation

Accessories & Power Supply:



50mm (1 1/2") union

32mm (1 1/4") &
38mm (1 1/2")
Flexi hose connector






Mounting stand



Switch mode
power supply

Product Information

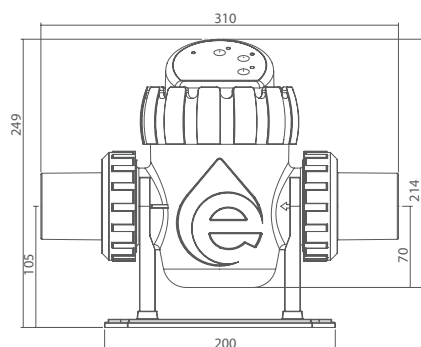

Code	Model	Input Voltage/ Frequency	Salt Level	Cell production rate	Maximum working pressure	Cell Connections	Working Temperature	Min. Flow	Max. Pool Volume
9130045	SSCnano4	110 - 240 V / 50-60 Hz	3500 ppm	4 g/hr	2.5 bar	1.5" / 50mm and 32mm & 38mm union	10-45 °C	3 m ³ /hr	20 m ³
9130046	SSCnano6			6 g/hr					30 m ³
9130047	SSCnano8			8 g/hr					40 m ³
9130048	SSCnano10			10 g/hr					50 m ³



EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS: Flat A-D, 20/F., Kai Bo 22, 22 Wing Kin Road,
Kwai Chung, HK

PHONE +852 2832 9880

www.emauxgroup.com

 **YOUR PREMIER SUPPLIER**